

Porcelaingres. Loft.



Technical Data

Loft | Summary



Loft Collection – Color: Loft Snow

Colors




Loft
Dark



Loft
Smoke



Loft
Sand



Loft
Snow

Technical features

Natural | R10 A+B | ≥ 6 mm

- 100×100



Natural | R10 A+B | ≥ 8 mm

- 120×60
- 60×60
- 60×30



Natural | R11 A+B+C | ≥ 20 mm

- 120×60
- 100×100
- 60×60



Specials

- Mosaic
- Bullnose
- Step



40% Raw material from recycling process
products assessed and found to comply
with the LEED and BREEAM regulations.


































[click here for](#)

Inspiration

Visit the collection webpage
in other languages.














Loft

Product details

												Slabs Variability Index
Format (cm)	120 × 60	120 × 60	100 × 100	100 × 100	60 × 60		60 × 60	60 × 30	30 × 30	30 × 30		
Thickness (mm)	±20 mm	±8 mm	±20 mm	±6 mm	±20 mm		±8 mm	±8 mm	±8 mm	±8 mm		
Finishing	Natural	Natural	Natural	Natural	Natural		Natural	Natural	Natural	Natural		The shade variation index is a rating to determine tile variation between individual pieces of the same color group.
Skid Resistance	R11 A+B+C	R10 A+BUGL	R11 A+B+C	R10 A+B	R11 A+B+C		R10 A+B	R10 A+B	R10 A+B	R10 A+B		
Description	-	-	-	-	-		-	-	Mosaic 3,1 × 3,1	Mosaic 4,7 × 4,7		
Loft Snow	X126390X2	X126390X8	X1010390X2	X1010390X6	X600390X2		X600390X8	X630390X8	X373390X8	X370390X8		 V2 slightly different tone
Loft Sand	X126391X2	X126391X8	X1010391X2	X1010391X6	X600391X2		X600391X8	X630391X8	X373391X8	X370391X8		 V3 different tone
Loft Smoke	X126392X2	X126392X8	X1010392X2	X1010392X6	X600392X2		X600392X8	X630392X8	X373392X8	X370392X8		 V3 different tone
Loft Dark	X126393X2	X126393X8	X1010393X2	X1010393X6	X600393X2		X600393X8	X630393X8	X373393X8	X370393X8		 V3 different tone
Features	 CLEAN+  LOOK+	 GRIP+  LOOK+	 CLEAN+  LOOK+	 GRIP+  LOOK+	 CLEAN+  LOOK+		 GRIP+  LOOK+	 GRIP+  LOOK+	 GRIP+  LOOK+	 GRIP+  LOOK+		
												Note
pieces - box	1	2	1	2	2		4	8	11			*Production upon request
boxes - pallet	32	36	24	26	30		32	40	-			
sqm - box	0,72	1,44	1	2	0,72		1,44	1,44	0,99			
sqm - pallet	23,04	51,84	24	52	21,6		46,08	57,6	-			
kg - sqm	45,0226	17,79	45,50	14,06	45,2407		17,41	17,33	1,57			
kg - box	32,416	25,618	45,50	28,12	32,573		25,07	24,955	17,27			

Loft

Product details

			*	*	*							
Format (cm)	 100 × 6,5	 60 × 7	 120 × 30	 100 × 30	 60 × 30							Slabs Variability Index The shade variation index is a rating to determine tile variation between individual pieces of the same color group.
Thickness (mm)	±6 mm	±8 mm	±8 mm	±6 mm	±8 mm							
Finishing	Natural	Natural	Natural	Natural	Natural							
Skid Resistance	-	-	R10 A+B	R10 A+B	R10 A+B							
Description	Bullnose	Bullnose	Step with grooves	Step with grooves	Step with grooves							
	Loft Snow	X1065390X6	X670390X8	X3213390X8	X3100390X6	X360390X8						 V2 slightly different tone
	Loft Sand	X1065391X6	X670391X8	X3213391X8	X3100391X6	X360391X8						 V3 different tone
	Loft Smoke	X1065392X6	X670392X8	X3213392X8	X3100392X6	X360392X8						 V3 different tone
	Loft Dark	X1065393X6	X670393X8	X3213393X8	X3100393X6	X360393X8						 V3 different tone

Technical product features

Declared values of production

Compliance with standards

The surfaces complies with the European standards EN 14411 (group B1a) and international standards ISO 13006 Annex G.












- ISO 10545-2 (Determination of dimensions and surface quality)
- ISO 10545-3 (Determination of water absorption)
- ISO 10545-4 (Determination of modulus of rupture and breaking strength)
- ISO 10545-6 (Determination of resistance to deep abrasion for unglazed tiles)
- ISO 10545-8 (Determination of linear thermal expansion)
- ISO 10545-9 (Determination of resistance to thermal shock)
- ISO 10545-12 (Determination of frost resistance)
- ISO 10545-13 (Determination of chemical resistance)
- ISO 10545-14 (Determination of resistance to stains)

And it must also guarantee conformity with:

- DIN 51094 (lightfastness of the colours)
- DIN EN 16165 - Annex B (to measure the surfaces suitability for laying in areas where people walk footwear. Defining the “R-value” of the surfaces according to the table below):
 $\alpha < 6^\circ$ = not classified
 $6^\circ \leq \alpha \leq 10^\circ$ = R9
 $10^\circ < \alpha \leq 19^\circ$ = R10
 $19^\circ < \alpha \leq 27^\circ$ = R11
 $27^\circ < \alpha \leq 35^\circ$ = R12
 $\alpha > 35^\circ$ = R13
- DIN EN 16165 - Annex A (to measure the surfaces suitability for laying in areas where people walk barefoot. Given an “A, B and C” value according to the table below):
 $\alpha < 12^\circ$ = not classified
 $12^\circ \leq \alpha < 18^\circ$ = A
 $18^\circ \leq \alpha < 24^\circ$ = B (A+B)
 $\alpha \geq 24^\circ$ = C (A+B+C)

Compliance with these characteristics is checked in accordance with the certified quality management system of the UNI-EN ISO 9001 standard in addition to being guaranteed by the manufacturer.

Porcelaingres surfaces are made with low environmental impact in accordance with LEED_ BREEAM guidelines by using both new strategies for the continuous improvement of environmental friendliness and the aim of reducing wasting of non-renewable resources, in addition to using natural raw materials commonly found in the environment and recycled materials.

Features	Norms	▲ Required standard	Declared values
 water absorption	ISO 10545-3	$\leq 0,5\%$	$\leq 0,05\%$
 sizes	ISO 10545-2	length and width $\pm 0,6\%$ max thickness $\pm 5,0\%$ max linearity $\pm 0,5\%$ max wedging $\pm 0,6\%$ max warpage $\pm 0,5\%$ max	$\pm 0,2\%$ max $\pm 5,0\%$ max $\pm 0,2\%$ max $\pm 0,2\%$ max $\pm 0,2\%$ max
 bending strength	ISO 10545-4	$\geq 35 \text{ N/mm}^2$	$\geq 48 \text{ N/mm}^2$ For 20mm slabs: $> 42 \text{ N/mm}^2$
 resistance to deep abrasion	ISO 10545-6	$\leq 175 \text{ N/mm}^3$	$\leq 140 \text{ mm}^3$
 thermal expansion coefficient	ISO 10545-8	testing method available	7 MK^{-1}
 thermal shock resistance	ISO 10545-9	testing method available	resistant
 frost resistance	ISO 10545-12	no sample must show alterations to surface	frost resistance
 chemical resistance	ISO 10545-13	no sample must show visible signs of chemical attack (acids-bases-additives for pools) except for products containing hydrofluoric acid and derivates.	unaffected
 stain resistance	ISO 10545-14	unglazed tiles: testing method available	class 5
 colour resistance to light	DIN 51094	no sample must show noticeable colour change	no change in brightness or colour
 skid resistance average coefficient of friction (μ)	DIN EN 16165 Annex B		R10 – natural (8mm) R11 – natural (20mm)
	DIN EN 16165 Annex A		A+B – natural (8mm) A+B+C – natural (20mm)

Certifications

Sensitivity towards ethycal, environmental, safety and quality concerns

Product Certifications:



LEED certification: is a global system used in 40+ countries to check if buildings are environmentally friendly. The LEED (Leadership in Energy and Environmental Design) It evaluates how well a building is sustainable in terms of the environment, society, and economy. The slabs in this tool have over 40% recycled material, following the ISO 14021 standard, ensuring the highest LEED points.

BREEAM certification is a widely used global standard that measures how buildings impact the environment. It has strictw rules and checks based on the latest technology and knowledge. The rating system demands certifications based on strict technical parameters and quality control.

You can find the updated list of certified collections at www.porcelaingres.com/downloads/.



UPEC classification associated with the QB certification mark attests to the compliance of floor and wall coverings with the technical requirements set out in certification reference documents. It assigns classifications of use indicating that the durability of a product is appropriate for use on specific types of premises.

The list of the certified products is available at <http://evaluation.cstb.fr/>



CE MARK - It indicates that Porcelaingres products comply with the requirements of 305/2011 UE directive – in particular with regard to health production and the users and consumers' safety – and may thus be freely circulated on the Community market. **For the declarations of conformity of each single product, please refer to:** www.porcelaingres.com/downloads/.



放射性水平A类
See official listing

The **China Compulsory Certificate** mark, commonly known as a **CCC Mark**, is a compulsory safety mark for our Great Format products imported, sold or used in the Chinese market.

The certification is available at www.porcelaingres.com/downloads/.



EPD (Environmental Product Declaration): a voluntary type III product declaration, based on analysis of the product life cycle (with a “from cradle to grave” approach) in accordance with the EN 15804 standard. This declaration is drawn up with reference to the guidelines of the UNI EN ISO 14040 standard and the specific PCR (Product Category Rules). This document describes the environmental impact linked to the entire life cycle of a specific quantity of product. Our Company was the first to certify its products (see www.environdec.com) with specific EPD, validated by an independent third-party Body.

The certification is available at www.porcelaingres.com/downloads/.



GREENGUARD certification ensures indoor products have minimal emissions of volatile substances for healthier environments. GREENGUARD Gold Certification considers safety for sensitive individuals and approves products for use in places like schools and healthcare facilities. Widely recognized globally in sustainable building programs, it is referenced by The Collaborative for High Performance Schools (CHPS) and Leadership in Energy and Environmental Design (LEED) in the United States.

Certified collections can be found at <https://spot.ul.com/>.

Integrated Management System Certifications:



ISO 9001 certification: for corporate Quality system management. The certification, valid at an international level, concerns corporate management in its entirety, from research and development to production, and from distribution to customer support. This system certifies that the Company has implemented an internal quality management system.

The certification is available at www.porcelaingres.com/downloads/.



ISO 50001 certification: for organizations committed to addressing their impact, conserving resources and improving the bottom line through efficient energy management. The standard specifies the requirements for establishing, implementing, maintaining and improving an energy management system, whose purpose is to enable an organization to follow a systematic approach in achieving continual improvement of energy performance, including energy efficiency, energy security, energy use and consumption.

The certification is available at www.porcelaingres.com/downloads/.

Environmental Information and Labels:

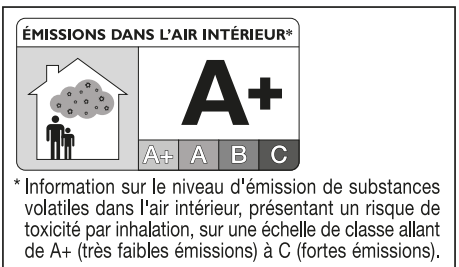


Declare label: a badge for construction materials, essentially functioning as a voluntary self-disclosure program. This initiative furnishes details about the material's composition, final assembly locations, lifespan, end-of-life options, and overall adherence to pertinent Living Building Challenge® (LBC) requirements.

Accessible through a complimentary database, Declare® labels prove to be an essential tool for designers and architects, empowering them to specify products aligning with the criteria of key green building standards, including Core Green Building certifications, LBC, LEED, and WELL.

All our materials hold the classification of being “Red List Free,” affirming their absence of chemicals listed in the Living Building Challenge's “Red List.”

More info available at <https://declare.living-future.org/products/ceramic-slabs>.





Porcelaingres GmbH

Irisstraße 1
03226 Vetschau – Germany
Tel. +49 (0)35433 / 597-0

GranitiFiandre spa

Via Radici Nord, 112
42014 Castellarano (RE) – Italy
Tel. +39 0536 819611

Castellarano Showroom

Via Guido Reni 2
42014 Castellarano (RE) – Italy
www.porcelaingres.com
info@porcelaingres.com

Vetschau Showroom

Irisstraße 1
03226 Vetschau – Germany
www.porcelaingres.com
info@porcelaingres.com

A BRAND OF  IRIS
CERAMICA
GROUP

Search “PORCELAINGRES”
on your app store
www.porcelaingres.com/pdfapp



Note: Technical Data updated on December 2023

Colors and decors reproductions are approximate. All rights are reserved.
Total or partial reproduction of text or illustrations of this catalogue is
prohibited and is subject to legal sanctions. Data were updated at the
catalogue printing time; therefore, the listed data may alter.